



CCT&Watt Tunable Post Top LED Light

Date:..... Location: .....

Product:..... Project:.....

Quantity:..... Catalog# .....



FEATURES

- 3Watts, 3CCT tunable, Built in universal photocell
- IP65, ETL DLC PREMIUM.
- Black housing, anti-salt treatment.
- 50,000 hours life time

SUITABLE APPLICATIONS

- Area Lighting
- Parking lot Auto Dealerships
- Shopping malls
- Sporting Complexes
- Path lighting
- Garden lighting

CONSTRUCTION:

Heavy die-cast aluminum alloy housing with black powder-coated finish. Glass lens.

ELECTRICAL:

Available as 120-277V input. -20°C to 45°C

OPTICAL SYSTEM:

High brightness lumileds LED chips. High quality tempered glass optics.120° beam angle.

INSTALLATION&MOUNTING:

3” round pole mounting by heights 15 to 30ft.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

PERFORMANCE

| Model NO                 | Photocell Control | Wattage | Voltage/CurrentInput |       | Light Efficiency | Kelvin Options    |
|--------------------------|-------------------|---------|----------------------|-------|------------------|-------------------|
|                          |                   |         | 120V                 | 277V  |                  |                   |
| LS-2PT(60/40/30/20)W-XXK | 3fcON/ 13fc OFF   | 20W     | 0.16A                | 0.07A | 130LM/W          | 3000K/4000K/5000K |
|                          | 3fc ON/ 13fc OFF  | 30W     | 0.25A                | 0.10A | 130LM/W          | 3000K/4000K/5000K |
|                          | 3fc ON 13fc OFF   | 40W     | 0.34A                | 0.14A | 130LM/W          | 3000K/4000K/5000K |
|                          | 3fc ON 13fc OFF   | 60W     | 0.50A                | 0.21A | 130LM/W          | 3000K/4000K/5000K |


| Model NO                    | Photocell Control | Wattage | Voltage/CurrentInput |        | Light Efficiency | Kelvin Options    |
|-----------------------------|-------------------|---------|----------------------|--------|------------------|-------------------|
|                             |                   |         | 120V                 | 277V   |                  |                   |
| LS-2PT(150/120/100/80)W-XXK | 3fcON/ 13fc OFF   | 80W     | 0.66A                | 0.28A  | 130LM/W          | 3000K/4000K/5000K |
|                             | 3fc ON/ 13fc OFF  | 100W    | 0.83A                | 0.36A  | 130LM/W          | 3000K/4000K/5000K |
|                             | 3fc ON 13fc OFF   | 120W    | 1.0A                 | 0.43A  | 130LM/W          | 3000K/4000K/5000K |
|                             | 3fc ON 13fc OFF   | 150W    | 1.25A                | 0. 54A | 130LM/W          | 3000K/4000K/5000K |

➤ Electric Characteristic

| Specification/Model     | LS-2PT(60/40/30/20)W-XXK |                |                 |                 |
|-------------------------|--------------------------|----------------|-----------------|-----------------|
| LED Driver              | UL Listed KHM Brand      |                |                 |                 |
| Input power             | 20W                      | 30W            | 40W             | 60W             |
| Lumens output           | 2600LM                   | 3900LM         | 5200LM          | 7800LM          |
| Efficiency              | 130LM/W                  | 130LM/W        | 130LM/W         | 130LM/W         |
| CRI                     | >72                      | >72            | >72             | >72             |
| Color Temperature       | 5000K                    | 5000K          | 5000K           | 5000K           |
| Input voltage           | 120-277V/AC              | 120-277V/AC    | 120-277V/AC     | 120-277V/AC     |
| Light distribution type | 120D                     | 120D           | 120D            | 120D            |
| Working temperature     | -20+45℃                  | -20+45℃        | -20+45℃         | -20+45℃         |
| Junction temperature    | <75℃                     | <75℃           | <75℃            | <75℃            |
| lamps efficiency        | ≥90%                     | ≥90%           | ≥90%            | ≥90%            |
| Certificate             | ETL CETL DLC             | ETL CETL DLC   | ETL CETL DLC    | ETL CETL DLC    |
| Equivalent              | 40-60W MH/HPS            | 60-100W MH/HPS | 100-120W MH/HPS | 120-200W MH/HPS |

| Specification/Model     | LS-2PT(150/120/100/80)W-XXK |                 |                 |                 |
|-------------------------|-----------------------------|-----------------|-----------------|-----------------|
| LED Driver              | UL Listed KHM Brand         |                 |                 |                 |
| Input power             | 80W                         | 100W            | 120W            | 150W            |
| Lumens output           | 10400LM                     | 13000LM         | 15600LM         | 19500LM         |
| Efficiency              | 130LM/W                     | 130LM/W         | 130LM/W         | 130LM/W         |
| CRI                     | >72                         | >72             | >72             | >72             |
| Color Temperature       | 5000K                       | 5000K           | 5000K           | 5000K           |
| Input voltage           | 120-277V/AC                 | 120-277V/AC     | 120-277V/AC     | 120-277V/AC     |
| Light distribution type | 120D                        | 120D            | 120D            | 120D            |
| Working temperature     | -20+45℃                     | -20+45℃         | -20+45℃         | -20+45℃         |
| Junction temperature    | <75℃                        | <75℃            | <75℃            | <75℃            |
| lamps efficiency        | ≥90%                        | ≥90%            | ≥90%            | ≥90%            |
| Certificate             | ETL CETL DLC                | ETL CETL DLC    | ETL CETL DLC    | ETL CETL DLC    |
| Equivalent              | 160-220W MH/HPS             | 220-280W MH/HPS | 280-360W MH/HPS | 360-450W MH/HPS |

## CCT&Watt Tunable and Photocell Options

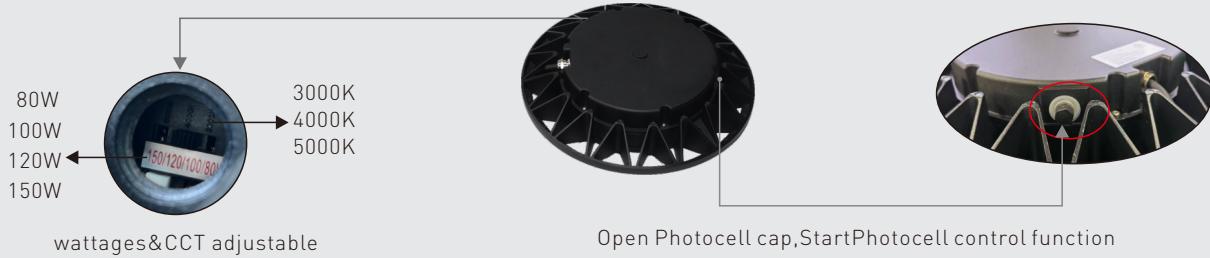

## Available Accessories:






4" Square pole mount base.




4" Round Pole mount base.

## ► DIMENSION

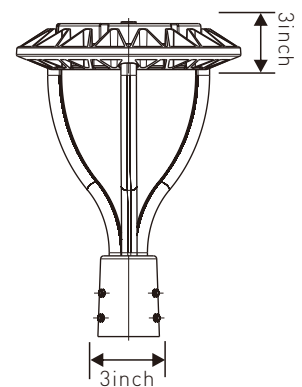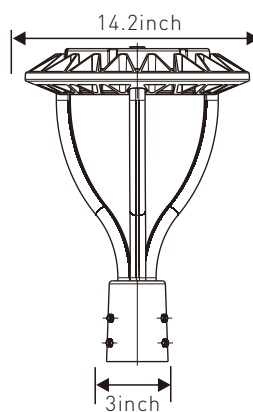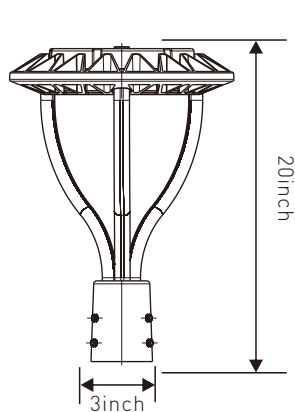

## DISTRIBUTION DIAGRAM

LS-2PT(60/40/30/20)W-XXK




AVERAGE BEAM ANGLE[50%]: 108°

UNIT:CD

Lumens:3600LM  
 Test Number:20W  
 Test Number:5000K

— C0/180,113.7  
 — C30/210,100.1  
 — C60/240,108.6  
 — C90/270,130.9

LS-2PT(60/40/30/20)W-XXK




AVERAGE BEAM ANGLE[50%]: 108°

UNIT:CD

Lumens:3900LM  
 Test Number:30W  
 Test Number:5000K

— C0/180,113.7  
 — C30/210,100.1  
 — C60/240,108.6  
 — C90/270,130.9

LS-2PT(60/40/30/20)W-XXK




AVERAGE BEAM ANGLE[50%]: 108°

UNIT:CD

Lumens:5200LM  
 Test Number:40W  
 Test Number:5000K

— C0/180,113.7  
 — C30/210,100.1  
 — C60/240,108.6  
 — C90/270,130.9

LS-2PT(60/40/30/20)W-XXK




AVERAGE BEAM ANGLE[50%]: 108°

UNIT:CD

Lumens:7800LM  
 Test Number:60W  
 Test Number:5000K

— C0/180,113.7  
 — C30/210,100.1  
 — C60/240,108.6  
 — C90/270,130.9

LS-2PT(150/120/100/80)W-XXK




AVERAGE BEAM ANGLE[50%]: 108°

UNIT:CD

Lumens:10400LM  
 Test Number:80W  
 Test Number:5000K

— C0/180,113.7  
 — C30/210,100.1  
 — C60/240,108.6  
 — C90/270,130.9

LS-2PT(150/120/100/80)W-XXK




AVERAGE BEAM ANGLE[50%]: 108°

UNIT:CD

Lumens:13000LM  
 Test Number:100W  
 Test Number:5000K

— C0/180,113.7  
 — C30/210,100.1  
 — C60/240,108.6  
 — C90/270,130.9

LS-2PT(150/120/100/80)W-XXK




AVERAGE BEAM ANGLE[50%]: 108°

UNIT:CD

Lumens:15600LM  
 Test Number:120W  
 Test Number:5000K

— C0/180,113.7  
 — C30/210,100.1  
 — C60/240,108.6  
 — C90/270,130.9

LS-2PT(150/120/100/80)W-XXK-P



AVERAGE BEAM ANGLE[50%]: 108°

UNIT:CD

Lumens:19500LM  
 Test Number:150W  
 Test Number:5000K

— C0/180,113.7  
 — C30/210,100.1  
 — C60/240,108.6  
 — C90/270,130.9

## Installation steps:

1. Find the power cord hole (Figure 1)
2. The threading rod corresponds to the hole to thread the power cord (Figure 2)
3. Twist the corresponding screw into the corresponding lever arm and tighten it. (Figure 3)
4. Loosen the handle screw and connect the corresponding LN G wire to make it waterproof. (Figure 4)
5. The lever arm is inserted into the pole and the screw is fastened. (Figure 5)




Figure1




Figure2

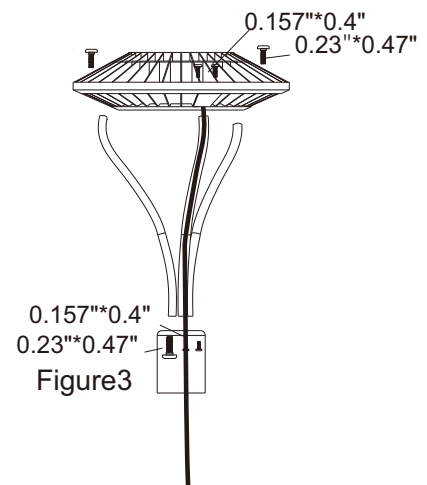


Figure3

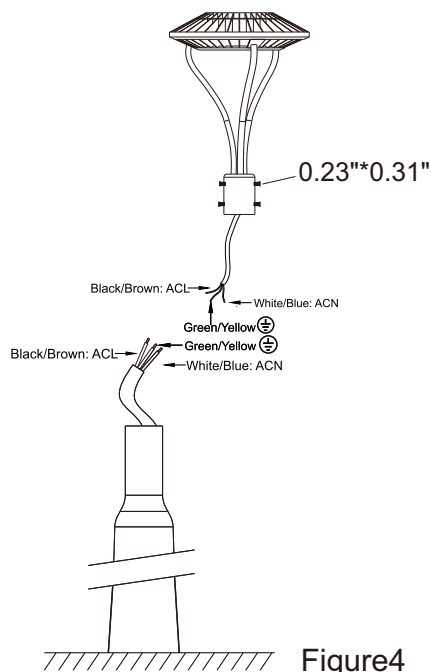


Figure4

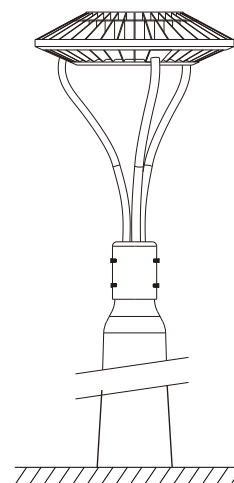


Figure 5