

JEE-T5®



FEATURES AND SPECIFICATIONS

Construction

- 4FT T5 LED Tube
- Milky cover
- Installation: Bypass Ballast(Direct Wire)
- Lamp Holder: Medium Bi-Pin (G5)
- Housing: Aluminum+PC

Electrical

- Input Voltage: 120-277Vac 50/60Hz
- Wattage: 24W
- Color: 4000K or 5000K
- 150 Lumens per Watt
- Wiring connection: double end

Applications

- Offices, retail, schools, restaurants, healthcare, residential, and hospitality applications.

Installation

- Replacement for conventional fluorescent lamp
- Operating temperature: -20°C ~ 45°C
- Damp or Dry Location only

Listing

- ETL Listed

Warranty


- 5-year limited warranty

Specs at a Glance		* Nominal Wattage (Switchable)
Model	ORM-T51224B-XX	
Wattage (W)*	24W	
Lumens (lm)	3600lm	
CCT (K)	4000K/5000K for option	
Efficacy (LPW)	150LM/W	
CRI	≥ 80	
Input Voltage	120-277VAC, 50/60Hz	
Operating Temp	-20°C ~ 45°C	
Certifications	ETL	
Warranty	5-year limited warranty	

 Ordering information

Model	Description
ORM-T51224B-XX	T5 LED Tube 4FT 24W 40000K or 5000K Milky Cover ,,150lm/w

 Dimensions

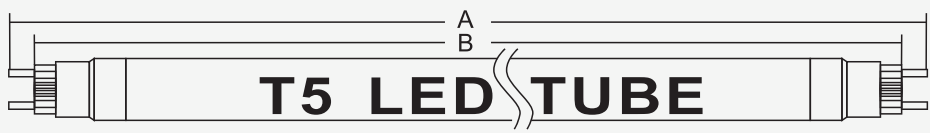


LAMP DIMENSIONS	
A	1163mm
B	1149mm

 Dimensions

- 1) Turn off the power to the light fixture before installation
- 2) Open the diffuser from the light fixture
- 3) Remove the fluorescent tubes and ballast
- 4) Connect L and N line as shown on the right
- 5) Plug LED tube into lamp holders and close the diffuser
- 6) Turn on the power and check the light distribution angle

WIRING METHOD



 Packing Information

Model number	L /inch	W/inch	H/inch	QTY/ctn	G.W./lbs	CTN QTY/pallet
ORM-T51224B-XX	46.8	6.3	6.5	25	18.5	1250pcs